

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Mika KIVIMAKI

Serial No.:

Filed: September 6, 2000

Title: USER INTERFACE FOR TEXT TO SPEECH
CONVERSION

Group:

#4) Priority Papers

4-4-01

A.T.



LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

September 6, 2000


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on British Patent Application No.(s) 9921022.1 filed September 6, 1999.

A certified copy of said British Application is attached.

Respectfully submitted,


ANTONELLI, TERRY, STOUT & KRAUS, LLP



Carl I. Brundidge
Registration No. 29,621

CIB/nac
Attachment
(703) 312-6600

6 SEP 1999



07SEP99 08:4733 002716
P01/7700 0.00 9921022.1

9921022.1

The Patent Office

NEWPORT
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

2. Patent application number

(The Patent Office will fill in this part)

PAT 99417 GB

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

05911995004

4. Title of the invention

USER INTERFACE FOR TEXT TO SPEECH CONVERSION

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU14ONG UK

Patents ADP number (if you know it)

7577638001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

BEST AVAILABLE COPY

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

16

Claim(s)

Abstract

Drawing(s)

1

7+7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

1

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

PAUL HIGGIN

Date

03.09.99

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr P Higgin 01252 865283

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BEST AVAILABLE COPY



INVESTOR IN PEOPLE

CERTIFIED COPY OF PRIORITY DOCUMENT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

22 AUG 2000

PAT 99417 GB

User interface for text to speech conversion

- 5 The present invention relates to a user interface for providing a text output on a display and an audio output corresponding to the displayed text.

The synthesis of human speech using electronic devices is a well developed and published technology and various commercial products are available. Typically
10 speech synthesis programs convert written input to spoken output by automatically generating synthetic speech and speech synthesis is therefore often referred to a "Text-to-Speech" conversion (TTS).

There are several problems in speech synthesis which, as yet, have not been
15 satisfactorily resolved and which impact on the comprehension of the synthetic speech by a user. One problem is that certain words and syllables are more difficult to pronounce than others. Another problem is that the pronunciation rules are language dependent and a French word in an English text will often be mispronounced by the speech synthesiser.

20

The above mentioned problems may be exacerbated in mobile electronic devices such as mobile telephones or pagers which may have limited processing resources

- 25 It would be desirable to improve the level of comprehension a user has of the speech output from such speech synthesiser systems.

According to one aspect of the present invention there is provided an electronic device comprising a user interface having: a display for displaying text and
30 speech synthesiser means including a loudspeaker, arranged to convert an

input, dependent upon a text, to an audio output representative of a person reading the text; and control means, for controlling the display and for providing an input to the speech synthesiser means, arranged to control the display of a text, to provide an input corresponding to the displayed text to the speech
5 synthesiser, and to highlight a portion or portions of the displayed text, wherein the highlighting of a text portion is delayed with respect to the audio output corresponding to the text portion.

Embodiments of the present invention therefore provide a display on which a
10 user can check a word which has been mispronounced by the speech synthesiser. Moreover, the highlighting draws the user's eye to the relevant portion of displayed text at the correct time. The delay allows time for a user to register that a synthesised word was not understood and to look to the display.

15 The highlighting of text is particularly important when a user is performing another task while listening to the synthesised speech. The user is directed to the relevant portion of text with the minimum of distraction. The user does not need to scan unnecessary text to find the relevant portion of text. The user therefore expends less time and effort in comprehending the synthesised
20 speech.

The control means may synchronise the highlighting with the conversion of text to audio output and/or may vary the highlighting with the conversion of text to audio output and/or may extend the highlighting selectively or unselectively
25 through the displayed text with the conversion of text to audio output.

The extending of highlighting through a text portion may lag the conversion of the text portion to audio output by the delay. The highlighting may extend discontinuously by portions of text corresponding to a word or words.
30 Highlighting of a text portion may be for a limited duration.

The highlighting may therefore isolate a portion or portions of text from a body of text, the isolation of text lagging the conversion of the text to audio output by the delay and the isolation being maintained for the limited duration.

5

The dimension of the highlighted portion may be variable or fixed. The dimensions of the highlighted portion may be a constant number of words, characters or syllables long.

- 10 The display may display the full sentence of text being converted. The display may display the previous predetermined plurality of words that have been converted.

- 15 The device may additionally comprise a dictionary, wherein the control means highlights words that are not in the dictionary. This highlighting may be different to the previously referred to highlighting.

- 20 The control means may be arranged to identify proper nouns in the text, and highlight them. This highlighting may be different to the previously referred to highlighting.

- The synthesiser means may provide signals to the control means to effect the highlighting of specific words. This highlighting may be different to the previously referred to highlighting.

25

The highlighting may be any way of visually differentiating the highlighted text from the not highlighted text. Contrast variation of the text and/or display background, colour variation of the text and/or display background; reformatting of the text including underscoring, using bold font, italic font or capitalisation and

changing font size or type; and enclosing the text in geometric shapes may in any combination be used to highlight text.

The delay may correspond to a fixed number of converted words or syllables.

- 5 The delay may correspond to a fixed time. The delay is preferably greater than 0.1 seconds. The delay may be less than 3 seconds.

The electronic device may be portable and is preferably hand-held.

- 10 The electronic device may be a radio communications device such as mobile radio telephone. The electronic device may be a document reader such as a Web browser, a Text-TV, a fax, a document browser for reading books, emails or other documents.

- 15 According to another aspect of the present invention there is provided a method for displaying text and providing speech synthesis of the text comprising the steps of: displaying the text; converting a text portion to audio output; determining that the text portion should be highlighted; delaying; and then highlighting the text portion. The display of a text may be already displayed when
20 the speech corresponding to the text is synthesised, it may be simultaneous with the synthesis of that speech or it may be delayed with respect to the synthesis of that speech.

- According to another, different, aspect of the present invention there is provided
25 an electronic device comprising: a user interface having: a display for displaying text and speech synthesiser means including a loudspeaker, arranged to convert an input, dependent upon a text, to an audio output representative of a person reading the text; and control means, for controlling the display and for providing an input to the speech synthesiser means, arranged to control the display of a
30 text, to provide an input corresponding to the displayed text to the speech

synthesiser, and to delay the display of a text portion with respect to the audio output corresponding to the text portion. This delay is preferably greater than 0.1 seconds. There is also provided a method for displaying text and providing speech synthesis of the text comprising the steps of: converting a text portion to audio output; delaying; and then displaying the text.

For a better understanding of the present invention and how it may be brought into effect reference will now be made by way of example only to the accompanying Figures in which:

Figure 1 illustrates an electronic device with a user interface having a loudspeaker and display

Figure 2 is a schematic illustration of the components of the electronic device illustrated in Figure 1

Figure 3 illustrates the unselective highlighting of portions of a body of text;

Figure 4 illustrates the selective highlighting of portions of a body of text which are not in a dictionary;

Figure 5 illustrates the selective highlighting of portions of a body of text which are proper nouns;

Figure 6 illustrates the selective highlighting of portions of a body of text which are identified as difficult to convert accurately by the text-to-speech synthesiser; and

Figure 7 illustrates an example database for controlling delays.

Figure 1 illustrates an electronic device 2. The electronic device communicates to a user through its user interface which includes a display 4 and a loudspeaker 6. The device broadcasts synthesised speech to a user through the speaker 6 and at the same time displays text, from which the speech is derived, on the display. A user who does not understand the broadcast speech can improve their comprehension by reading the display. Portions of the display are highlightable to draw the users attention to those portions. Highlighting of text only occurs after the loudspeaker has broadcast the synthesised speech corresponding to the text. The electronic device may be any device which requires an audio-visual interface. It may be a personal digital assistant (PDA), a radio communications device such as mobile radio telephone e.g. a car-phone or hand-held phone, a computer system, a document reader such as a Web browser, a Text-TV, a fax, a document browser for reading books, emails or other documents or the like.

Although the display 4 and loudspeaker 6 in Figure 1 are shown as being integrated in a single unit they may be separate.

Figure 2 is a schematic illustration of the electronic device 2. The device 2 in addition to having the display 4 and the loudspeaker 6 has a processor 12 for driving the display and the loudspeaker and for accessing a memory 10. The memory 10 stores text data supplied via an input 30. The processor 12 is illustrated as two functional blocks- a controller 14 and a text-to-speech engine 16. The controller 14 and text-to-speech engine 16 may be implemented as software running on the processor 12.

The text-to-speech engine 16 drives the loudspeaker 6. It receives a text input 18 from the controller and converts the text input to a synthetic speech output 22 which is transduced by the speaker 6 to sound waves. The speech output may be one word at a time, one phrase at a time or one sentence at a time.

The controller 14 reads the memory 20 and controls the display 4 and the text-to-speech engine 16. The controller having read text data from the memory provides it as an input 18 to the text-to-speech engine 16 and controls the display to display the text data using control signals 16. The displayed text corresponds to the text converted by the text-to-speech engine 16.

The memory 10 stores text data which is read by the controller 14. The controller 14 uses the text data to produce the input 18 to the text-to-speech engine 16 and the control signals 16 to the display. Text data is stored in the memory 10 by the input device 30. The input device in this example includes a radio transceiver for receiving text data in the form of SMS messages or emails.

The controller also controls the display to highlight text using the control signals 16. Highlighting of text includes anything which visually differentiates a portion of text from the remaining body of text on the display 4. Contrast variation of the text and/or display background, colour variation of the text and/or display background, reformatting of the text including underscoring, using bold font, italic font or capitalisation and changing font size or type and enclosing the text in geometric shapes may in any combination be used to highlight text.

The highlighting of the text is synchronised to the conversion of the text to audio output.

As each portion of the text is converted to audio output the controller determines if that text portion should be highlighted, if it should be highlighted, it delays, then controls the highlighting of the text portion. A portion of text may be a character, a syllable, a word, a phrase, a sentence or sentences.

The delay is preferably of the order of a second or seconds but may be varied. It is greater than 0.1 second and less than 3 seconds. In particular, the delay may be related to the speed of the text-to-speech processor, the delay increasing as the speed decreases and visa-versa.

5

The controller 14 may be selective or unselective in the highlighting of text. Unselective highlighting is the highlighting of each portion of text.

The highlighted portion of text may have a fixed length or a variable length. A
 10 portion of text, once highlighted remains temporarily highlighted until un-highlighted by the controller 14. Typically, this will occur after a predetermined time. When the highlighting of text is unselective it may occur when the highlighting has extended beyond the portion to be un-highlighted by a predetermined amount. When the highlighting of text is selective it may occur
 15 when the controller determines if a text portion, ahead of the portion to be un-highlighted by a predetermined amount, should be highlighted.

In Figures 3, there is illustrated an example of unselective highlighting. In Figures 4, 5 and 6 are illustrated different examples of selective highlighting. In each of
 20 these examples, the text stored in the memory 10 and read by the controller 14 is "Thank-you for your email. I look forward to meeting tou [sic] this afternoon in London, a bientot." To the left of the Figure is illustrated the display 16, controlled by controller 14, on which the text is shown. To the right the audio output of the loudspeaker 6 is illustrated. The visual output to the left and the audio
 25 output to the right evolve as the figure is descended. The time arrow to the left of the Figure marks the evolution.

The operation of the controller 14 will now be described in more detail. The controller accesses a text from the memory 10. It parses the text for selective
 30 highlighting purposes and for unselective highlighting and text to speech

conversion. The parsing for selective highlighting purposes involves the identification of individual words by recognising space characters within the text. The parsing for text to speech synthesis involves the separation of the text into separate text groups each of which includes one or several words. The word groups are sent one at a time to the TTS engine 16.

If the controller is performing selective highlighting it analyses each of the words identified in the text. It can separately identify and indicate whether the word is unusual or foreign, whether the word is a proper name or whether the TTS engine is likely to mispronounce the word. The controller has a dictionary for the language being used which may contain words of common usage. A comparison of the word with the dictionary and its absence from the dictionary indicate that the word is "unexpected" and it can be selectively highlighted to indicate this. The controller may identify proper names in the English and French languages for example by recognising capital font for letters which start a word but which do not follow a full stop (period). The controller can then identify the word for selective highlighting to indicate that the word is "proper". The controller may have a lexicon for the TTS which identifies words or letter groupings within words which may be incorrectly converted by the TTS engine or receive feed back from the TTS engine 16 which identifies a word group which is or is likely to be incorrectly converted by the TTS engine. The controller can then identify the word or the word or words in the group for selective highlighting to indicate that the word or group of words is "difficult".

The controller maintains a database to enable control of the delay in highlighting and/or text display. An example database is illustrated in Figure 7. For the purposes of the example the phrase "Thank-you for your email. I look forward to meeting you this afternoon in London, a bientot." has been parsed. The database 30 has an entry for each of the 17 words in the phrase. Each entry has four fields. The first field 32 records the number of characters in a particular word

entry. The second field 34 records which text group the word entry belongs to by storing a text group id which is different for each text group. The third field 36 records whether selective highlighting is required for the word and whether the word should be identified as "difficult", "unexpected" or "proper". The fourth field 38 records when the time or the expected time when the TTS engine 16 produces an audio output for the text group of which the entry is part.

After parsing the text input the entries for the first 32, second 34 and third 36 fields can be recorded for each entry. The input to the fourth field may be input predictively or responsively. For responsive input, when the controller sends a text group to the TTS engine it also sends the text group ID. The TTS engine stores the received text group IDs in the order in which they are received in a FIFO 16. When a text portion has been converted to speech it pops the FIFO returns the text group ID identifying the text group which has just been converted as signal 18 to the controller. When the controller receives this ID it records the time from its internal clock in the fourth field against those entries which have the same text group ID in their second field as the returned text group ID. For predictive input, an approximation is used for the time taken on average to convert a word (or character) to speech from when it is sent to the TTS engine. This is a parameter of the TTS engine 16. From the database 30, the number of words (and characters) including punctuation in a text group can be calculated and an estimate of the time at which the text group will be converted to speech deduced. The expected time of conversion for each text group is deduced. For text group the appropriate time is recorded the fourth field for the each entry which identifies that text group in its second field.

Referring to Figure 7 there are four discrete text groups having text group IDs 1, 2, 3 and 4. Group 1 includes the words/characters "Thank-you for your email." . Group 2 includes the words/characters " I look forward to meeting tou this afternoon". Group 3 includes the words/characters " in London,". Group 4

includes the words/characters " a bientot.". The text groups 1, 2, 3 and 4 are respectively converted to speech at times t_1 , t_3 , t_5 and t_7 .

When the controller sends a text group to the TTS engine 16 it controls the display to display that text group. It may in certain circumstances be desirable to delay the display of the text so that it is not displayed in advance of the text being highlighted. This delay in displaying the text, if used, should be greater than 0.1 seconds but less than three seconds.

At a time $t_2 = t_1 + T$, where T is a predetermined delay, the controller accesses the database and controls the display to highlight the characters comprising the text group 1 if unselective highlighting is activated. If selective highlighting of "difficult" words is activated, then at time t_2 , the controller accesses the database and controls the display to selectively highlight the word "email".

At a time $t_4 = t_3 + T$, where T is a predetermined delay, the controller controls the display to highlight the characters comprising the text group 2 if unselective highlighting is activated. If selective highlighting of "unexpected" words is activated, then at time t_4 the controller accesses the database and controls the display to selectively highlight the word "tous".

At a time $t_6 = t_5 + T$, where T is a predetermined delay, the controller accesses the database and controls the display to highlight the characters comprising the text group 3 if unselective highlighting is activated. If selective highlighting of "proper" words is activated, then at time t_6 the controller accesses the database and controls the display to selectively highlight the word "London".

At a time $t_8 = t_7 + T$, where T is a predetermined delay the controller accesses the database and controls the display to highlight the characters comprising the text group 4 if unselective highlighting is activated. If selective highlighting of

"unexpected" words is activated, then at time t_8 the controller accesses the database and controls the display to selectively highlight the word "bientot".

If selective highlighting of "difficult " words is activated, then at time t_8 the controller accesses the database and controls the display to selectively highlight
5 the word "bientot".

The delay T can be adjusted and varied by the user to achieve their preferred delay. The delay T may be varied in dependence on the number of words and characters in a text group. In particular, the predetermined delay may be
10 decreased as the text group size increases.

The removal of highlighting from a word or text group may be effected in a number of different ways. For example in unselective highlighting, highlighting may not be removed until the whole sentence in which the text group appears
15 has been highlighted for at least a certain time. Alternatively highlighting may be removed from a text portion after it has been highlighted for a certain time. Another alternative is to have one or a certain number of contiguous text groups highlighted at any one time where the highlighting of a new text group results in the removal of highlighting from an old text group and the progression of the
20 highlighting window through the text. For selective highlighting the word may remain highlighted until the adjacent text has its highlighting removed or would have done so if it had been highlighted or it may be highlighted for a certain time.

According to the first example (of unselective highlighting), illustrated in Figure 3,
25 as each portion of the text is converted to audio output the controller determines by default that the text portion should be highlighted, it delays, then controls the highlighting of the text portion. The highlighting is temporary. The highlighting extends at a leading edge through the displayed text one word or several words at a time and contracts at a trailing edge one word or several words at a time.

At time t0, the controller 14 places the text onto the display 4 and provides the text to the text-to-speech engine 16. At time t1, a portion of text, in this case the sentence "Thank-you for your email." is converted to audio output. The displayed text is unaffected.

5

After a delay, at time t2, the controller 14 highlights the portion of text "Thank-you for your email." in the body of displayed text.

At time t3, another portion of text, in this case the phrase "I look forward to meeting tou this afternoon" is converted to audio output. The displayed text and highlighting is unaffected.

10

After a delay, at time t4, the controller 14 highlights the portion of text "I look forward to meeting tou this afternoon" in the body of displayed text. By the time t4, the controller has un-highlighted the sentence "Thank-you for your email."

15

At time t5, another portion of text, in this case the phrase "in London" is converted to audio output. The displayed text and highlighting is unaffected.

After a delay, at time t6, the controller 14 highlights the portion of text "in London" in the body of displayed text. At the time t6, the controller is still highlighted the phrase "I look forward to meeting tou this afternoon".

20

At time t7, another portion of text, in this case the phrase "a bientot" is converted to audio output, the displayed text and highlighting is unaffected.

25

After a delay, at time t8, the controller 14 highlights the portion of text "a bientot" in the body of displayed text. By the time t8, the controller has un-highlighted the phrase "I look forward to meeting tou this afternoon".

30

According to a second example (of selective highlighting), illustrated in Figure 4, highlighting may be selectively applied to the displayed text. In this example, text is highlighted if it is not in a dictionary.

- 5 The controller determines if a word in a text group should be highlighted, if it should be highlighted, it waits after the conversion of the text group to speech, then controls the highlighting of the text portion.

At time t0, the controller 14 places the text onto the display 4. A portion of text,
10 in this case the sentence "Thank-you for your email." is sent to the TTS engine for conversion to audio output and converted at time t1. The controller determines if that text portion should be highlighted in the displayed text. It checks each word in the sentence against the words stored in a dictionary. Each word is recognised and no highlighting is required. The displayed text is
15 unaffected.

At time t3, a portion of text, in this case the phrase "I look forward to meeting tou this afternoon" is converted to audio output. The controller determines if that text portion should be highlighted in the displayed text. It checks each word in the
20 sentence against the words stored in a dictionary. Each word except "tou" is recognised. "tou" is a typographical error and is not in the dictionary. The controller therefore determines that the text portion "tou" should be highlighted, it delays until time t4, then controls the highlighting of the text portion "tou".

25 At time t5 a portion of text, in this case the phrase "in London" is converted to audio output. The controller determines if that text portion should be highlighted in the displayed text. It checks each word in the sentence against the words stored in a dictionary. Each word is recognised and no highlighting is required.

At time t7, a portion of text, in this case the French phrase "a bientot," is converted to audio output. The controller determines if that text portion should be highlighted in the displayed text. It checks each word in the sentence against the words stored in a dictionary. "bientot" is not recognised in an English dictionary.

- 5 The controller determines that the text portion "bientot" should be highlighted, it delays until time t8, then controls the highlighting of the text portion "bientot". By the time t8, the controller has un-highlighted "tou".

According to a third example, illustrated in Figure 5, highlighting may be selectively applied to the displayed text. In this example, text is highlighted if it is a proper name. As each portion of the text is converted to audio output the controller determines if that text portion should be highlighted, if it should be highlighted, it delays, then controls the highlighting of the text portion. The controller identifies words which begin with a capital letter but which are not following a full-stop (period). The word "London" is produced as audio output at time t5 and is highlighted, after a delay, at time t6. By time t8 the highlighting has been removed.

According to a fourth example, illustrated in Figure 6, highlighting may be selectively applied to the displayed text. In this example, text identified as problematic for the text-to-speech engine 16 is highlighted. As each portion of the text is converted to audio output the controller determines if that text portion should be highlighted, if it should be highlighted, it delays, then controls the highlighting of the text portion. In this example the word "email" is highlighted first. The estimated accuracy of the synthesis of "email" into speech at time t1 falls below a threshold and the controller, in response, controls the highlighting of the word, after a delay, at time t2. The highlighting of "email" has been removed by time t7, when the phrase "a bientot" is synthesised. The estimated accuracy of the synthesis of "bientot" into speech at time t7 falls below a threshold and the controller controls the highlighting of the word "bientot", after a delay, at time t8.

In the preceding examples illustrated in Figures 3 to 6, the same type of highlighting (underscoring) was used. Of course, the different examples illustrated in the Figures could each use a different type of highlighting.

- 5 Furthermore, the controller could simultaneously perform any combination of the different examples on the same body of text.

Although a particular example of the present invention has been described in the preceding paragraphs, it should be appreciated that modifications and variations
10 to the examples given can be made without departing from the scope of the invention as claimed.

Claims

1. An electronic device comprising:

a user interface having

5 a display for displaying text and

speech synthesiser means including a loudspeaker, arranged to convert an input, dependent upon a text, to an audio output representative of a person reading the text; and

control means, for controlling the display and for providing an input to the speech
10 synthesiser means, arranged to control the display of a text, to provide an input corresponding to the displayed text to the speech synthesiser, and to highlight a portion or portions of the displayed text, wherein the highlighting of a text portion is delayed with respect to the audio output corresponding to the text portion.

15 2. A device as claimed in claim 1 wherein the control means synchronises the highlighting with the conversion of text to audio output.

3. A device as claimed in claim 1 or 2 wherein the control means varies the highlighting with the conversion of text to audio output.

20

4. A device as claimed in any preceding claim wherein the control means extends the highlighting through the displayed text with the conversion of text to audio output.

25 5. A device as claimed in claim 4 wherein the control means unselectively extends the highlighting through all of the text

6. A device as claimed in claim 4 or 5, wherein the extending of highlighting through a text portion lags the conversion of the text portion to audio output by
30 the delay.

7. A device as claimed in any one of claims 4 to 6, wherein the highlighting extends discontinuously by portions of text corresponding to a word or words.

5 8. A device as claimed in any preceding claim wherein the control means highlights a text portion for a limited duration

9. A device as claimed in claim 8 wherein the highlighting isolates a portion or portions of text from a body of text, the initiation of the isolation of text lagging
10 the conversion of the text to audio output by the delay and the isolation being maintained for the limited duration.

10 A device as claimed in any preceding claim wherein the dimension of the highlighted portion is variable.

15

11. A device as claimed in any preceding claim wherein the dimension of the highlighted portion is a constant number of words long.

12. A device as claimed wherein the display displays the full sentence of text
20 being converted.

13. A device as claimed in any preceding claim wherein the display displays the previous predetermined plurality of words that have been converted.

25 14. A device as claimed in any preceding claim further comprising a dictionary, wherein the control means highlights words not in the dictionary.

15. A device as claimed in claim 14 wherein the control means provides different highlighting for the words not in the dictionary

30

16. A device as claimed in any preceding claim wherein the control means is arranged to identify proper nouns in the text, and highlight them.

17. A device as claimed in claim 16 wherein the control means provides different highlighting for the proper nouns in the text.

18. A device as claimed in any preceding claim wherein the synthesiser means provides signals to the control means to effect the highlighting of specific words.

19. A device as claimed in claim 18 wherein the control means provides different highlighting to the specific words.

20. A device as claimed in any preceding claim wherein highlighting may comprise any one of : contrast variation of the text and/or display background; colour variation of the text and/or display background; reformatting of the text including underscoring, bold font, italic font, capitalisation, changing font size or type; and enclosing text in geometric shapes.

21. A device as claimed in any preceding claim wherein the delay corresponds to a number of converted words or syllables.

22. A device as claimed in any preceding claim wherein the delay corresponds to a fixed time.

23. A device as claimed in any preceding claim wherein the delay is greater than 0.1 seconds.

24. A device as claimed in any preceding claim wherein the delay is less than 3 seconds.

25. A device as claimed in any preceding claim wherein the electronic device is a document reader or a hand-held communications device.

26.A hand-held radio communications device comprising:

5 a user interface having:

a display for displaying text and

speech synthesiser means including a loudspeaker, arranged to convert an input, dependent upon a text, to an audio output representative of a person reading the text; and control means for controlling the display and for providing
10 an input to the speech synthesiser means, arranged to control the display of a text, to provide an input corresponding to the displayed text to the speech synthesiser, and to highlight a portion or portions of the displayed text, wherein the highlighting of a text portion is delayed with respect to the audio output corresponding to the text portion.

15

27. A document reader comprising a user interface having:

a display for displaying text and

speech synthesiser means including a loudspeaker, arranged to convert
20 an input, dependent upon a text, to an audio output representative of a person reading the text; and control means for controlling the display and for providing an input to the speech synthesiser means, arranged to control the display of a text, to provide an input corresponding to the displayed text to the speech synthesiser, and to highlight a portion or portions of the displayed text, wherein
25 the highlighting of a text portion is delayed with respect to the audio output corresponding to the text portion.

28. A car having a device as claimed in claim 26 or a document reader as claimed in claim 27, wherein the display is mounted for use by the driver.

30

29. A device or circuitry substantially as hereinbefore described with reference to the accompanying figures and/or as shown in the figures.

30. A method for displaying text and providing speech synthesis of the text comprising the steps of:

displaying the text;

converting a text portion to audio output;

determining that the text portion should be highlighted;

delaying; and then

highlighting the text portion.

31. An electronic device comprising:

a user interface having:

a display for displaying text and

speech synthesiser means including a loudspeaker, arranged to convert an input, dependent upon a text, to an audio output representative of a person reading the text; and

control means, for controlling the display and for providing an input to the speech synthesiser means, arranged to control the display of a text, to provide an input corresponding to the displayed text to the speech synthesiser, and to delay the display of a text portion with respect to the audio output corresponding to the text portion.

32. A method for displaying text and providing speech synthesis of the text comprising the steps of:

converting a text portion to audio output;



delaying; and then

displaying the text;

33. A device as claimed in claim 31 or a method as claimed in claim 32 where the delay is greater than 0.1 seconds.

Abstract

An electronic device comprising: a user interface having a display for displaying
5 text and a speech synthesiser including a loudspeaker, arranged to convert an
input, dependent upon a text, to an audio output representative of a person
reading the text. The device may delay with respect to the audio output
corresponding to a portion of text the display of the portion of text. The device
may also or alternatively delay with respect to the audio output corresponding to
10 a portion of text the highlighting of the portion of text within a displayed text.

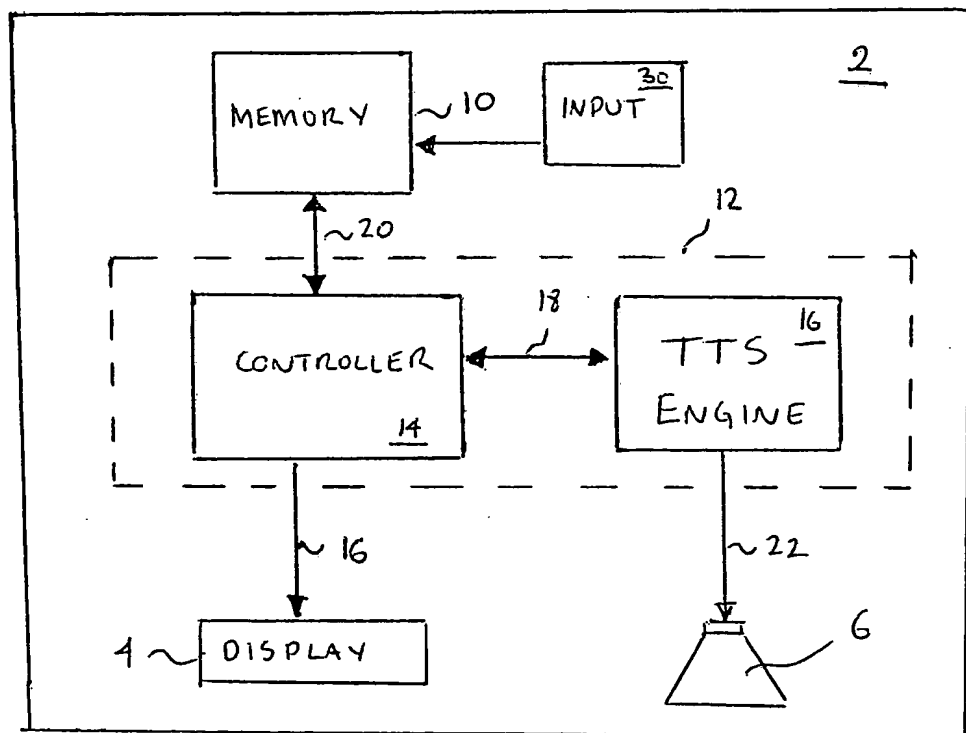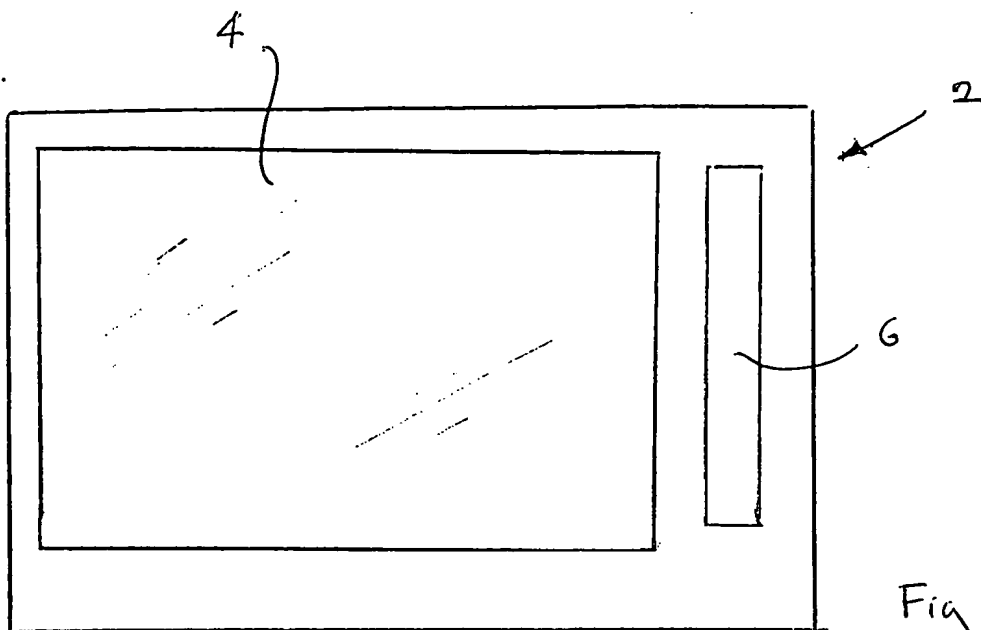

Text

"Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot."

Displayed Text

Synthesised Speech


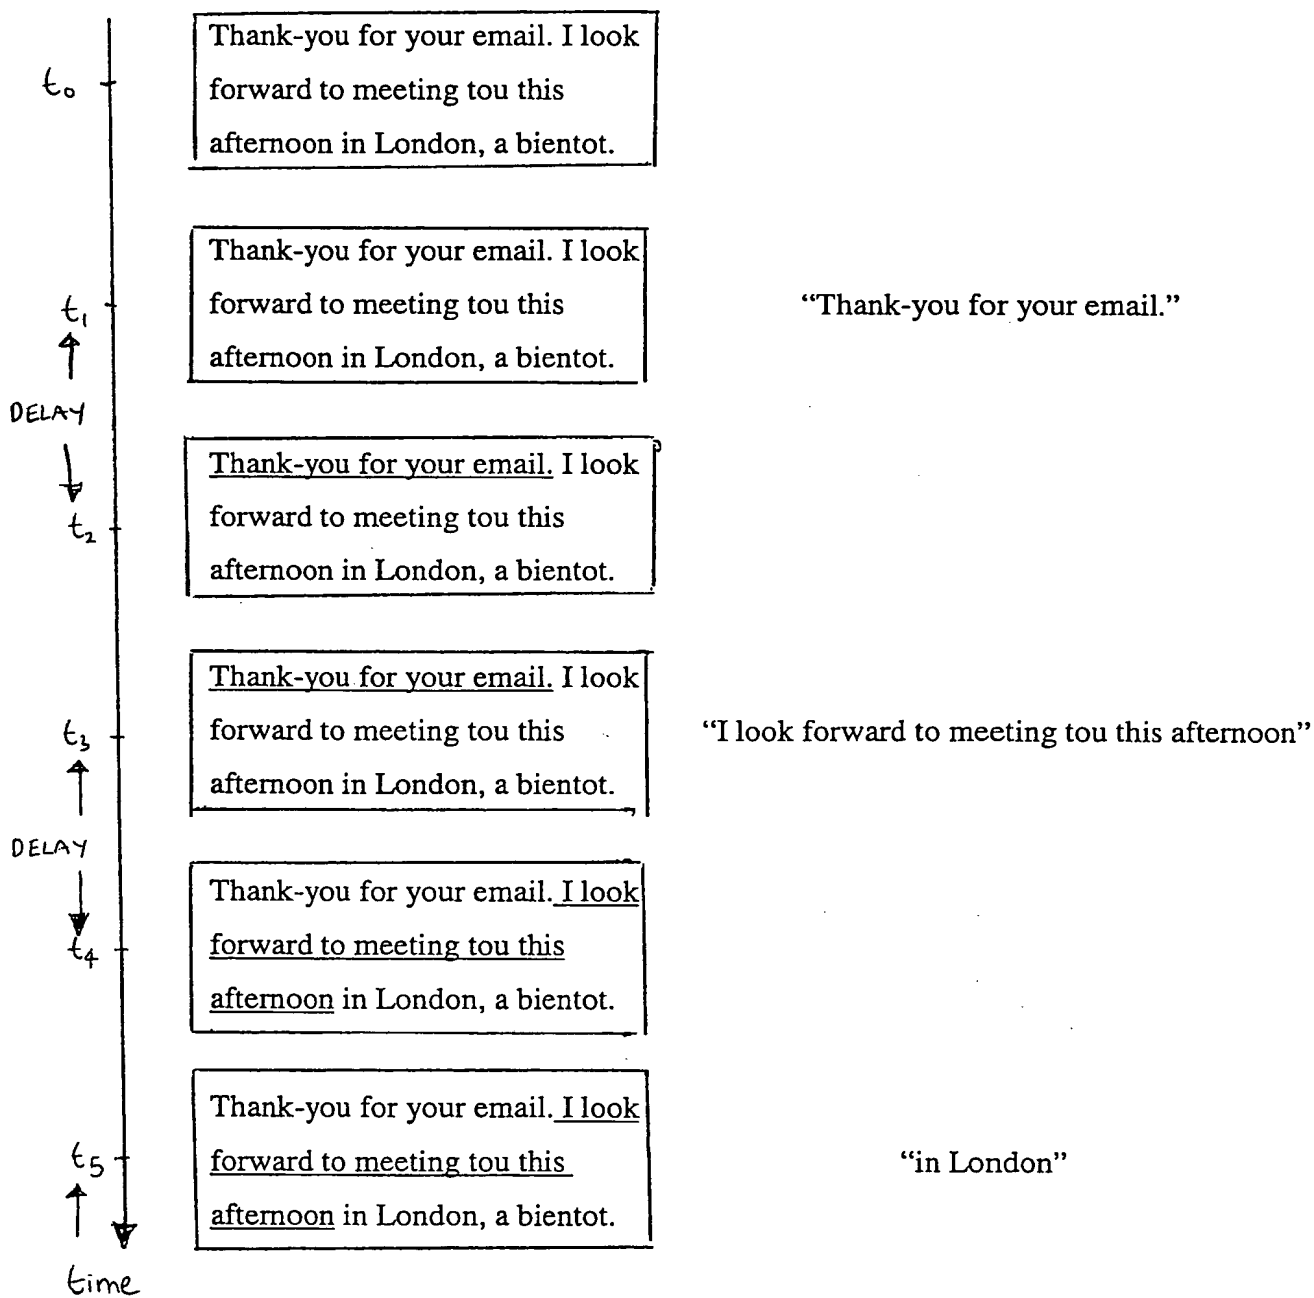


Fig 3

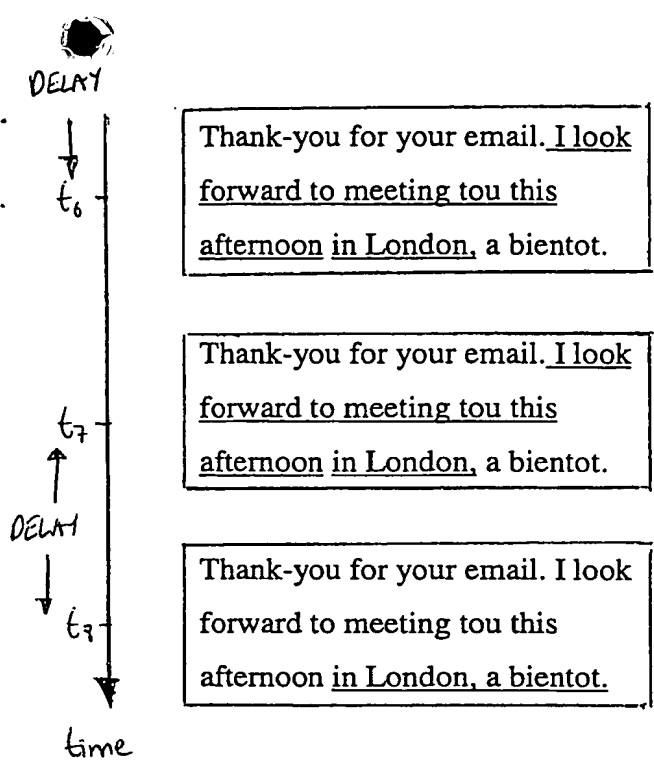


"a bientot"

Fig 3 (continued).

4/7

UNEXPECTED

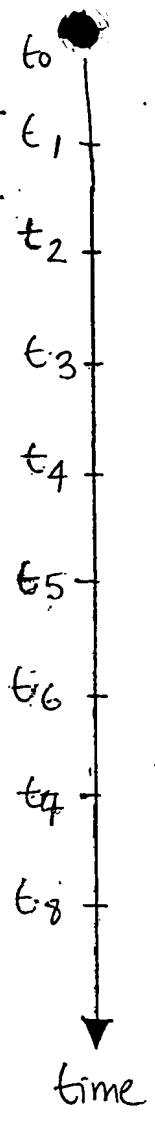

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot."

Thank-you for your email.

I look forward to meeting tou this afternoon


in London,

a bientot

Fig 4

5/7

PROPER



Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot."

Thank-you for your email.

I look forward to meeting tou
this afternoon


in London,

a bientot

Fig 5

6-17
7

DIFFICULT



Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot.

Thank-you for your email. I look forward to meeting tou this afternoon in London, a bientot."

Thank-you for your email.

I look forward to meeting tou this afternoon

in London,

a bientot

Fig 6

Fig 7

Word Size	Text Group ID	SELECTIVE HIGHLIGHT TYPE	TIME OF AUDIO OUTPUT
Thank-you	1		t1
for	1		t1
Your	1		t1
email.	1	DIFFICULT	t1
I	2		t3
look	2		t3
forward	2		t3
to	2		t3
meeting	2		t3
you	2	UNEXPECTED	t3
this	2		t3
afternoon	2		t3
in	3		t5
London,	3	PROPER	t5
a	4		t7
bientot.	4	UNEXPECTED DIFFICULT	t7

32 →
 34 →
 36 →
 38 →
 30

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.